




**IRWL Enhanced
Security Barriers**

**5 YEAR
WARRANTY**

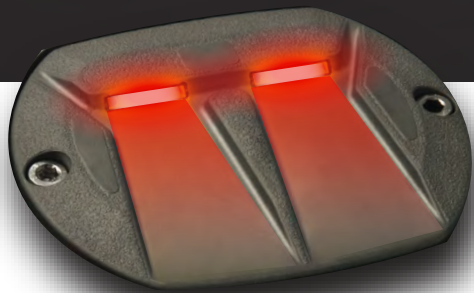



**Military, Commercial, and
Federal entry gate enhancement!**

SDDCTEA -55-15 Gates manual 2014 IRWL compliant



Nothing compares to a LaneLight IRWL system when you target the **tunnel vision of a Distracted Driver**. Maximize the visibility of your barricades and gates with a LaneLight LED enhanced IRWL system. Seamless controller integration...

Dramatically Enhanced VISIBILITY!

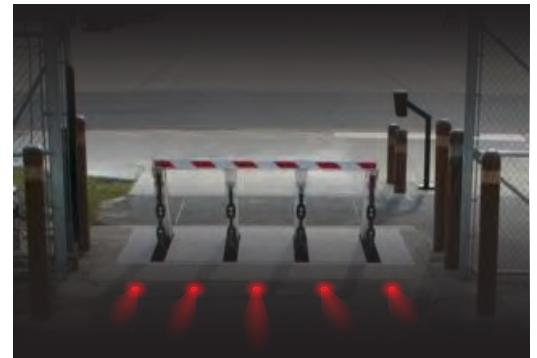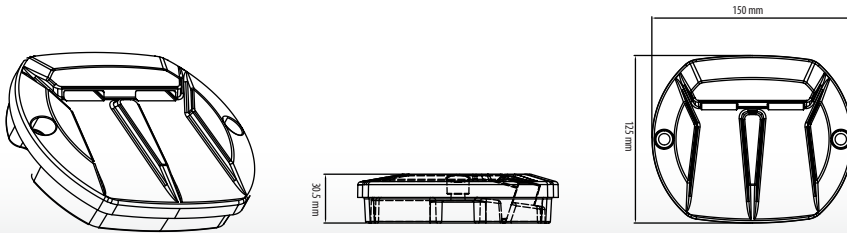

SPECIFICATIONS



Dimensions -LED module	150mm x 125mm (5.9"x 5")
Dimensions - Housing	175mm (7")
Protrusion from pavement	3 mm (.12") or Flush Mount option
Housing depth (incl.sub base)	65mm (2.56")
Daytime visible	3000 ft (dimnable by PWM at night)
Snowplowable	Yes, with Flush Mount option
Housing - LED module	Stainless Steel
Housing	Aluminum
Sealing	IP68
Load rated	5,000 kg compression
Operating temperature	-20C to +50C
Lens	Boron/glass
LED face	Uni-directional
LEDs per unit	16
LED color	Red (also available in amber, white, and green)
Activation	Integration with existing controller
Power	Hardwired; Low voltage AC 2.5w (nominal)
Controller	Microprocessor; (sold separately)
Wiring	18 AWG direct burial or drain equipped conduit 2 or 3 wire configurations

