

## **2204 Series** **Pathway Lighting**



Dynamic and beautiful decorative lighting fixtures for residential or commercial gardens, parks, lawns, parking lots, and pathways.

***A BRIGHTER way Home***




Uni-Directional



Bi-Directional

## 2204 Series Pathway and Architectural Lighting

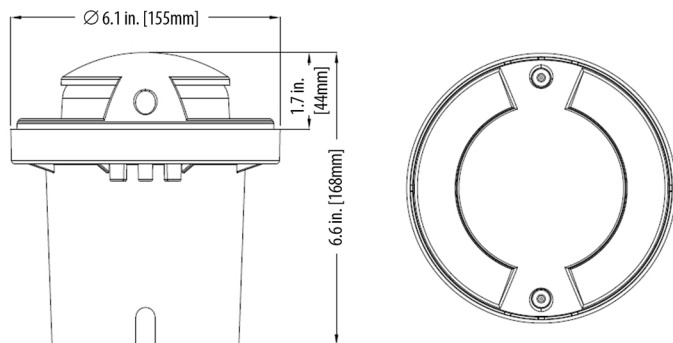

The bi-directional model is shown here; dimensions are the same for uni-directional units. Uni-directional models have only one light port.

### SPECIFICATIONS

Operating Voltage	120 VAC
Power Consumption	14.4 VA
Casing Material	Die cast aluminum and polycarbonate
Weight	2.65 lbs. [1.2 kg]
Fixture Dimensions	Diameter: 155mm    Height: 168mm
Fixture Above Ground	1.7 in. [44mm]
Cap Color Options	Black or Silver
Lens Material	Polycarbonate
Lamp Type	LED
Light Modes	Flash, Steady, Cascading
Light Configurations	Uni-directional or bi-directional illumination
LED Color Options	Warm White, Cool White, Red, Yellow, Green, Blue
Visibility	>656 ft. [>200m]
Operating Temperature	-40° to 167°F [-40° to +75°C]
Waterproof Rating	IP68
Certifications	CE
Installation	In-ground; PVC burial sleeve
Warranty	1 year limited warranty for defects in manufacturing, factory assembly and materials only; excludes damage caused by vehicles or vandalism

### OVERVIEW

The 2204 Series recessed lighting fixtures are suitable for decorative pathway and architectural lighting in gardens, streets, squares, villas, parks, lawns, supermarkets, parking lots, retail stores, tourist attractions, places of worship, government and other public buildings, amusement parks and any location where low-profile illumination fixtures are desired. The PVC burial sleeve can be installed into concrete, asphalt, stone or wood. Not recommended for use in soil, mulch, wood chips or other soft material.

### CONTACT INFORMATION

To order, or for more information, contact ITEM/LaneLight:

**Unit 16 – 755 Vanalman Avenue**

**Victoria, BC V8Z 3B8 Canada**

**Toll-Free: 1-866-466-4836**

**Fax: 250-381-4830**

**info@lanelight.com**

**www.lanelight.com**

