



5
YEAR
WARRANTY



BIKE LANE **SYSTEM**

Bicycle-Activated LEDs'
Signal Dependent Function
Alerts Vehicles Preparing
to Turn

Maximize visibility, efficiency, and safety along your dedicated bicycle lanes with LaneLight IRWL BikeSafe systems and accessories. Seamless traffic controller integration...

Dramatically Enhanced VISIBILITY!

Bike Lane System

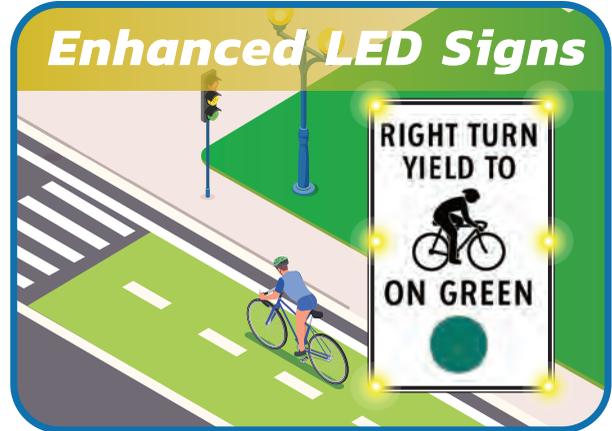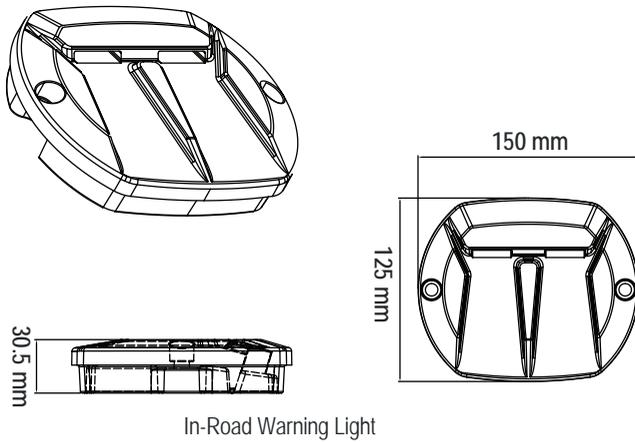

SPECIFICATIONS

Dimensions - LED module	150mm x 125mm (5.9"x 5")
Dimensions - Housing	175mm (7")
Protrusion from pavement	3mm (.12") or Flush Mount option
Housing depth (incl.sub base)	65mm (2.56")
Daytime visible	3000 ft (dimmbable by PWM at night)
Snowplowable	Yes, with Flush Mount option
Housing - LED module	Stainless Steel
Housing	Aluminum
Sealing	IP68
Load rated	5,000 kg compression
Operating temperature	-20C to +50C
Lens	Boron/glass
LED face	Uni-directional
LEDs per unit	16
LED colour	Amber, White, Green or Red
Activation	Integration with Trafc Signal controller
Power	Hardwired; Low voltage AC 2.5w (nominal)
Controller	Microprocessor; (sold separately)
Wiring	18 AWG direct burial or drain equipped conduit 2 or 3 wire configurations